



Dexter Torsion Axle Form



Today's Date

Customer Acct #

Sold To

Ship To


Branch

CSR

SO#

Customer PO #

Ship Via

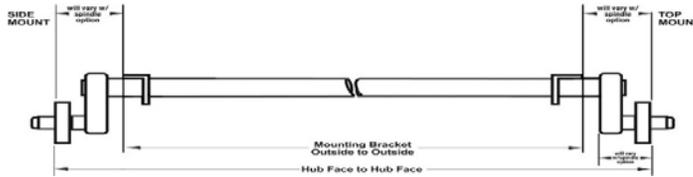

Axle Capacity:

Type

 #8 600-1.1k
 #9 1-2.2k #10 2.2-3.5k
 #11 5.5-6k #12 5.5-7k
 #13 7-8k
 #13GD 9-10k
 #13HD 9-10k #14T 10k
 #14 12k
 #12AG 5.5-7k
 #13AG 8k #13HAG 9-10k
 Triple Addon

Rated Capacity: _____

Axle Options:

Spindle Type

 Short Long

Removable

Bracket Type

 Standard Reverse

Featherlite Airstream RTR Double

Bracket Height

 Low Profile 1" High Profile 3" High Profile

Beam Finish

 Paint Galvanized Powder Coat

Bracket Mounting

 Top Mount (No AP Kit) Side Mount Steel (AP Kit) Side Mount Aluminum (AP Kit)

Airflex

 Yes No

Camber

 Full Half None


Drop Center (V-Camber)

 Yes No

Measurements:

Hub Face

Degree of Arm

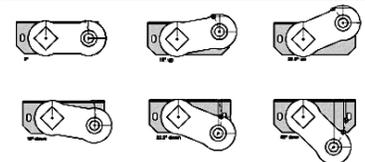 10Up 22.5Up 0
 10Down 22.5Down
 32Down 45Down

Outside of Bracket

Hub Options:

 Beam Only Idler (No Brakes No Flange) Idler Flanged (No Brakes) Electric Self Adjust
 Electric Manual Adjust Duo Servo Hydraulic Hydraulic Freebacking Hydraulic Disc
 Single Servo Hydraulic Hydraulic Freebacking Marine Add Parking Brake

Bolt Pattern

2k Idler Hub Diameter (545)

 5.5" (8"-12" Wheel) 6.5" (12"-15" Wheel)

Stud Size

 1/2" 9/16" 5/8" Coned 5/8" Flanged

Lube

 Grease EZ-Lube Nev-R-Lube Oil

Wiring Addon

 33" Wire 32" Braided Sleeve Conduit Wire Protector 12' Wire

Notes: _____

PLEASE DOUBLE CHECK THE MEASUREMENTS AND ADVISE US OF ANY CORRECTIONS. I VERIFY THAT THE AXLE(S) INDICATED ABOVE ARE CORRECT AND ACKNOWLEDGE THAT ALL SPECIAL ORDER AXLES ARE NON-REFUNDABLE AND MAY REQUIRE A DEPOSIT.

Quantity: _____

Customer Signature (required): _____